
HAKI Ram

Easy to erect with few components!

HAKI Ram is unusually easy to erect. There are few basic components to make assembly simple and a complete range of accessories such as brackets and access ways to adapt the scaffolding to different types of work.





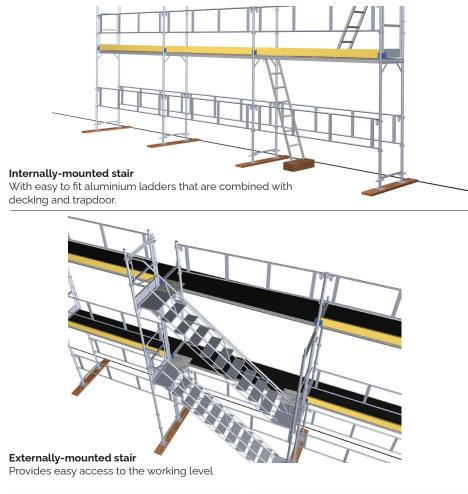



Frame, frame with toeboard and L-frame G and AL



Ladder For decking unit with hatch



Stair, handrail With platform and locking G and AL

Offset scaffolding


Perfect for use with things like bay windows. Note the location of the wall ties.



Guardrail With spring locking catch G and AL



Bracket 300, 700, 800 Jaw width 22 mm G



Archway

Using aluminium beams you can easily construct an archway for vehicles to pass through. HAKI pavement frame makes it simple and safe to make a passage through or along the scaffolding. Ideal for pavements.



Level differences

Larger differences in ground level are easy to eliminate with short frames and transom ground levels.



Deck, deck with trapdoor W=300 mm, 600 mm Loading class 3



Bracket AL 650, 700 Jaw width 22 mm AL



Guardrail SKRDF with toeboard, SKRA



Transom ground level, Platform locking ULB, LSB





Roof protection

Use a safety gate with net instead of a guardrail and you provide good protection against falling off and falling objects.



Adaptation to various types of façade work Internally-mounted brackets SK 300/700 are an effective way to adapt to the shape of the façade.



Working under the eaves

With externally-mounted bracket SK 700 you can create excellent space for working under the eaves.



