


Part No.: V113-00X Name: Catchfan 4m/6m Weight: See Table kg Standard: EN 1263-1 Material: Galvanised Steel/Aluminium Dimensions: mm




This Technical Document must always be used in conjunction with **HAKI's General Qualifications** -See below

- 1. <u>Always</u> plan your work and installation
- 2. <u>Always</u> select the right equipment
- 3. <u>Always</u> regularly inspect your system

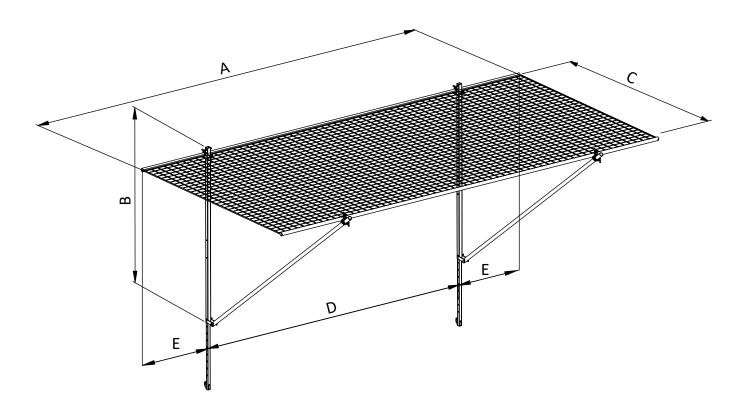

Name	Art No.	А	В	С	D	E	Weight [kg]
Catchfan 4m	V113-003	4000	2500	3300	2000 ±500	1000 ±500	~74
Catchfan 6m	V113-006	6000	2500	3300	4000 ±500	1000 ±500	~82



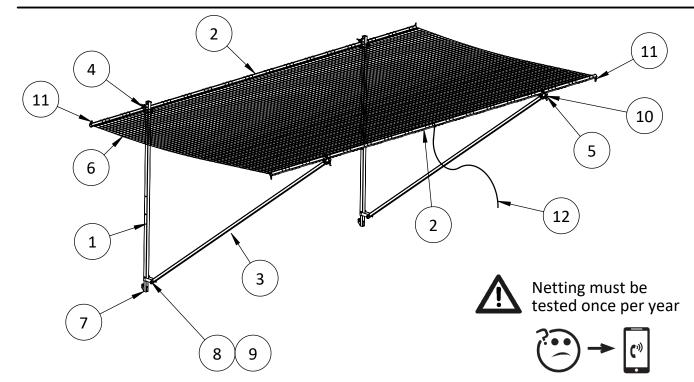

+44 (0) 1227 711072

ITEM NO.	Part No	TITLE	QTY.	Weight (pcs) [kg]
1	V113-030	Body 2.5m		11.32
	V114-001	114-001 4.00m Profiled Inner/Outer Tube (48mm Dia)		5.8
2	OR		-	
	V114-004	6.00m Profiled Inner/Outer Tube (48mm Dia)	2	8.7
3	V114-002	4.20m Catchfan Bracing Tube (48mm Dia)	2	6.09
4	V113-023	Catchfan Sqr - Rnd Coupler (DF 48mm)	2	1.6
5	V113-024	Catchfan Rnd - Rnd Coupler (DF 48x48)	2	1.6
	V113-013	Catchfan 4m Net	-	9
6 OR			-	
	V113-010	Catchfan - 6m Net	1	12.5
7	V113-018	Catchfan 1.60m Extension Leg	1	5.66
8		M12 x 80mm Hex Head Screw	4	
9		M12 Stainless Steel Nyloc Nut	4	
10		5.5 x 25mm x 16mm Washer Hex Head Self Drilling Screw	2	
11	V133-082	Karabiner (6mm x 60mm)	4	
12	V114-055	7.5kN Polypropylene Rope (10mm x 220m)	1	0.2


* Only drop forged couplers made to EN 74 Class B should be used.



All fittings to be routinely examined. Further examinations to be undertaken after each project and following any severe weather conditions to ensure all equipment is in good condition and working order.




1. Configuration

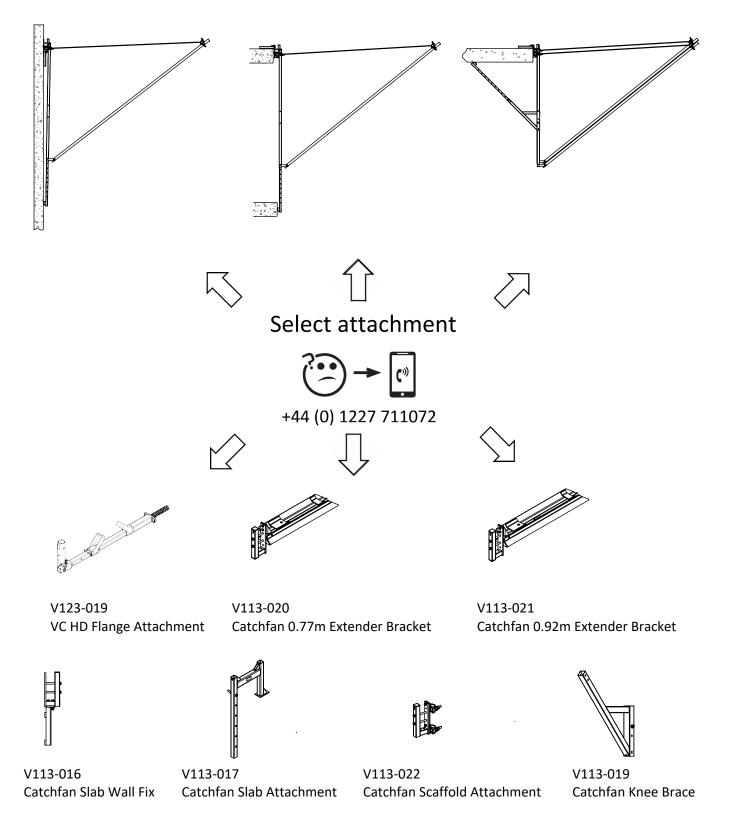





2. Assembly

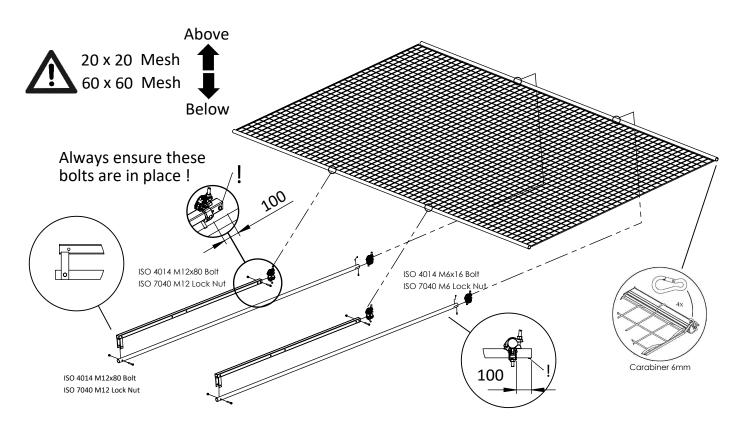

3. Lifting and positioning

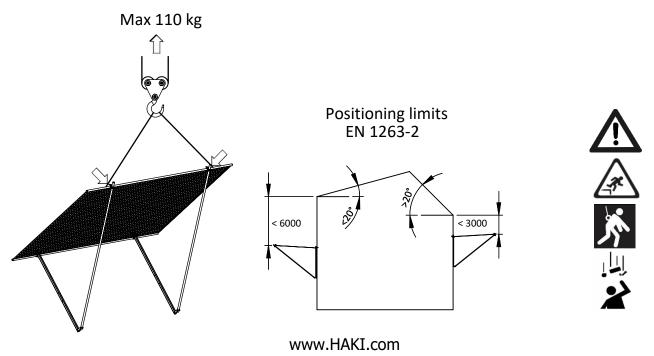




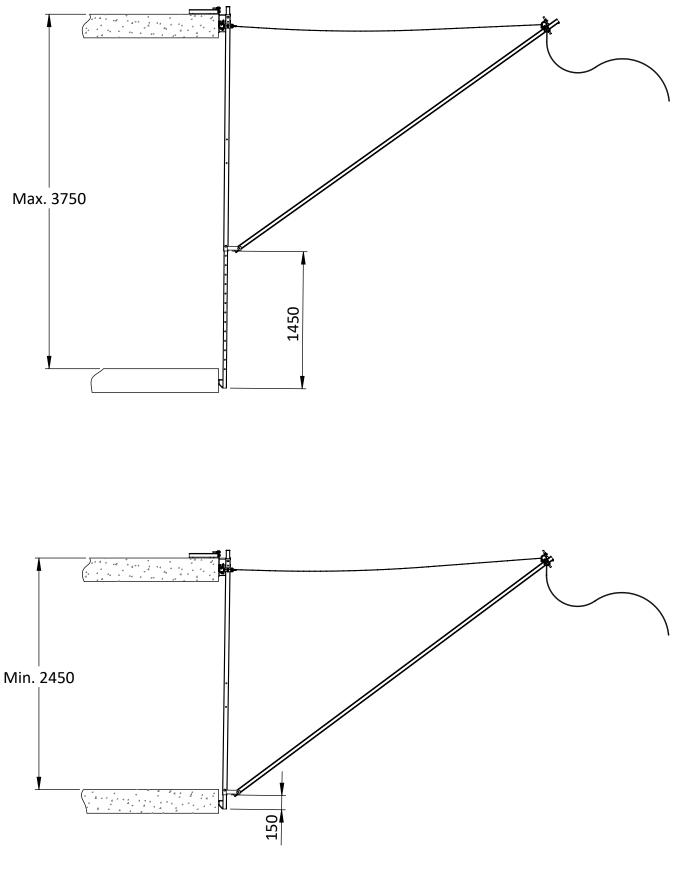



Close gaps

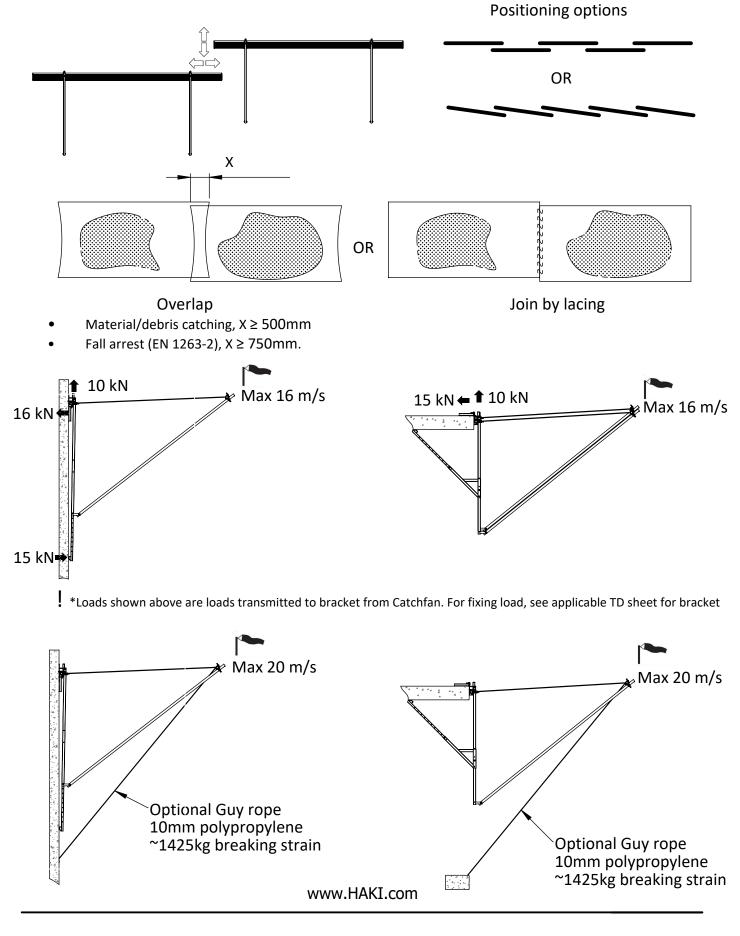



4. Handling, Transport and Storage



AVOID SPARKS FROM CUTTING & WELDING

Stillage/Pallet:

- Net and Inner/Outer Tubes pre assembled (c/w carabiners)
- Body and bracing tubes pre-assembled
- Extension Legs
- Attachments, bolts and couplers (bagged)



5. Removing from service

DO NOT use catchfan after it has been subject to a load falling into it. DO NOT use catchfan if the net has not be tested in the past 12 months. DO NOT use catchfan if the metal framework is deformed, damaged or worn. DO NOT use catchfan if fixings, bolts or couplers are deformed, damaged or worn.

Remove the net from service 12 months after the last test strand has been tested. Nets removed from service should be destroyed/recycled.

Haki offers a net test strand testing service - please ask for details.



General Qualifications



These General Qualifications are applicable to all HAKI products and must always be read in conjunction with each products Technical Documentation (TD).

General Always check general product condition before use If in doubt always call by contracting a neuroscriptic

- If in doubt always ask by contacting a representative of HAKI
- Reject any damaged or rusty components
- HAKI products and systems provide temporary protection during construction activity.
- HAKI products are NOT tested or intended:
 - to withstand impact by any vehicle,
 - to support or provide control of the public,
 - for the containment of bulk materials.

Always Plan your works

- Take note of location, proximity to permanent and temporary hazard structures.
- Take note of dimensions, layout and access areas.
- Always identify both the fall hazard for the installer and the falling materials hazard for persons and property below.
- These identified hazards should also be considered on dismantling.
- HAKI strongly recommends seeking competent Work at Height advice if in any doubt about the installer's or other's safety.
- Note the component weight as given on the TD sheets and ensure suitable handling equipment is available.
- Ensure local site Risk Assessment / Method Statement detail is observed and followed.

Fixing selection

- All fixings should be confirmed as suitable for the chosen application site.
- Material type and thickness, edge proximity, depth of embedment, and proximity to other fixings, all impact the strength of a fixing. Please refer to manufacturer's instructions for fixing guidance and limitation.
- The dimensions for installation and the load capacity should be confirmed by the fixing manufacturer for each application.
- Competent fixings advice should be sought if in any doubt.

Fine mesh containment

- Note that the addition of any fine containment mesh (such as on barriers or safety nets) increases the wind load attracted to the supports.
- Technical advice must be sought before any such addition.

Weather

- HAKI products and systems can be adversely impacted by significant wind speeds. Please note limitations on product TD and take any recommended remedial action. If in doubt, contact a HAKI representative.
- If in doubt, cease work, and use additional protection measures as required.
- All safety systems should be kept clear of ice and snow.

Inspection

- All installed systems should be checked at least once every 7 days by a competent person, to ensure its continued integrity and that there are no signs of any potential failing.
- We recommend that these checks are recorded in a site log.
- Please ensure any defective product identified during inspection is replaced immediately.

Loading

- Any HAKI products subjected to loading, or used in anger, should be assessed to ensure it continues to provide the necessary protection. If this involves removing from service you must ensure the area is otherwise protected.
- The system should then be fully inspected, any components replaced as necessary, and the installation confirmed as fit for continued use by a competent person.

Storage

- HAKI recommends the use of its own storage and transit solutions.
- Take careful note of lifting and loading limits.
- All components should be stored in a manner that limits any detrimental environmental effect

due to weather or corrosive substances.

Traceability

• All HAKI products are traceable.

Кеу		
	Symbol	Meaning
1.	00	Tech Data
2.		If in doubt, check online @ www.HAKI.com
3.		If in doubt call HAKI on +44 (0)1227 711072
4	I	Always Check/ Always confirm
5	<u>A</u>	Fall Hazard
6		Do this
7	X	Don't do this
8	Ň	Be Aware
9	<pre>C</pre>	Recycle damaged materials
10	${\bf j} \stackrel{\leftrightarrow}{\leftarrow} {\bf i}$	Recommended Distance

Spinney House, Wilcox Close, Aylesham, Kent. CT3 3EP. Telephone: +44 (0) 1227 711072 vertemax@haki.com Registered in England No. 07254120 • VAT No. GB 992 7373 70

4.4		
11	×	Secure yourself against falling
12		Protect those below from falling equipment
13		Catch fan – Keep Clean from snow
14		Sheer Load
15		Tensile Load
16	C	Moment Load
17		Max Wind Load
18	+7	Check Weekly
19		Insert
20	×	Install
21	? Nm	Torque Spanner and settings

Spinney House, Wilcox Close, Aylesham, Kent. CT3 3EP. Telephone: +44 (0) 1227 711072 vertemax@haki.com www.HAKI.com Registered in England No. 07254120 • VAT No. GB 992 7373 70

22		Elat Hoad Scrowdriver
22	ð	Flat Head Screwdriver
23	C	Cross Head/Phillips Screwdriver
24		Tighten
25		Untighten
26		Tighten by hand
27	F € F <p< td=""><td>Drill and select appropriate anchor</td></p<>	Drill and select appropriate anchor
28		Floor/General
29		Concrete slab/floor
30		Timber Beam
31		Alu Beam

Spinney House, Wilcox Close, Aylesham, Kent. CT3 3EP. Telephone: +44 (0) 1227 711072 vertemax@haki.com www.HAKI.com Registered in England No. 07254120 • VAT No. GB 992 7373 70